



Project: Date:

Prepared By:

Comments



FEATURES

- Patented can-free design with J-box and spring loaded clips attached to LED trim
- IC rated for contact with insulation and Air Tight to prevent heating and cooling losses
- Dimmable to 10% with approved LED dimmers
- Wet-location rated
- Title 24 Compliant (CRI >90)
- ENERGY STAR®
- White baffle regressed trim

APPLICATIONS

Conference Room
Medical Office
Office Lobby
Residential
Retail

CERTIFICATIONS

OPTICS

- Frosted white lens
- Regressed reflector

... Visit our website for more information.

TRIM ORDERING OPTIONS

Model Number	Kelvin (CCT)	Watts	Lumens	CRI	Trim Color
EV608943WH30	3000K	13	895	91	White Can-free

SPECIFICATIONS

Warranty:	5 Years	Max. Ambient Temp:	45° C	R9-Value:	Beam Angle:	103°
Expected Life:	50,000 hrs	Min. Ambient Temp:	-18° C	Power Factor:	THD:	<20%







Project: Date:

Prepared By:

Comments

DIMMING COMPATIBILITY

February 27, 2017		407943 Triac/Phase-cut dimmers									
Brand	Type	Series	Model #	Wiring	watts	dimming method	Version Code	Max # of Luminaires	Notes	minimum dimming range	
Lutron	C.L	Ariadni/Toggler C.L	AYCL-153P	Single-pole/3-way	150	Toggler	T8, T9	13	3-Way only works with a 3-Way switch	3%	
			TGCL-153P								
			Diva C.L								
			Skylark C.L								
			Skylark Contour C.L								
			LGCL-153P								
	C.L	Maestro C.L	MACL-153M	Single-pole/3-way/multi-location	150	Digital	2014	13	3-Way only works with a 3-Way switch or dimmer companion MA-R (not a dimmer). Multi-location only work with MA-R	4%	
			MSCL-VP153M	Single-pole/3-way/multi-location	150	Digital/Vacancy Sensor	T2	13	3-Way only works with a 3-Way switch or dimmer companion MA-R (not a dimmer). Multi-location only work with MA-R	4%	
			MSCL-OP153M	Single-pole/3-way/multi-location	150	Digital/Occupancy Sensor					
			MRF2-6CL	Single-pole/3-way/multi-location	150	Digital and Wireless	M6	13	3-Way or multi-location only works with companion MA-R (not a dimmer)	4%	
			Nova T	NTCL-250	Single-pole	250	slide to off	BR Y02	22		4%
			Grafik T	GT-150	Single-pole/3-way/multi-location	150	Digital	T6	13	3-Way or multi-location only works with companion GT-AD (not a dimmer)	3%
RF C.L	Grafik T RF	GTJ 150	Single-pole/3-way/multi-location	150	Digital	M6	13	3-Way or multi-location only works with companion GT-AD (not a dimmer)	3%		
										Wireless	Caseta
Leviton	Universal Dimmer	Decora	DSL06-1L	Single-pole/3-Way	300	slide with ON/OFF button	NA	27	3-Way only works with a 3-Way switch	24%	
			Illuma Tech	IP106-10	Single-pole/3-Way	150	slide with ON/OFF button	NA	13	3-Way only works with a 3-Way switch	4%
			Sureslide	6672-1L	single	150	slide to off	NA	13		12%
			Sureslide	6674-PO	Single-pole/3-Way	150	slide with ON/OFF button	NA	13	3-Way only works with a 3-Way switch	4%
			Remu	RE106	Single-pole/3-Way	300	Digital	NA	27	3-Way only works with remote RE00R Requires neutral wire connection	0%
			Decora Digital	DDMX1-BL	Single-pole/3-Way	450	Digital or Bluetooth	NA	41	3-Way only works with remote DDOOR-DL Requires neutral wire connection	0%

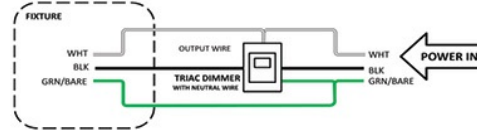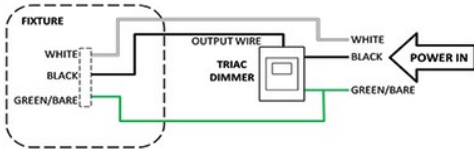

DIMENSIONS

Photometrics

New Earth Lighting/ DF ProPlus
Main (866) 992-2278 | Support@dfproplus.com

20101 South Santa Fe Avenue
Rancho Dominguez, CA 90221