



Project:  Date:

Prepared By:

Comments



**FEATURES**

- Patented can-free design with J-box and spring loaded clips attached to LED trim
- IC rated for contact with insulation and Air Tight to prevent heating and cooling losses
- Dimmable to 10% with approved LED dimmers
- Wet-location rated
- Title 24 Compliant (CRI >90)
- ENERGY STAR®
- Interchangeable trim rings available to customize the look of the ceiling

- APPLICATIONS**
- Conference Room
  - Medical Office
  - Office Lobby
  - Residential
  - Retail

**CERTIFICATIONS**

**OPTICS**

- Magnetic interchangeable trim rings available
- Frosted white lens
- Regressed reflector

... Visit our website for more information.

**TRIM ORDERING OPTIONS**

| Model Number | Kelvin (CCT) | Watts | Lumens | CRI | Trim Color     |
|--------------|--------------|-------|--------|-----|----------------|
| EV407941WH40 | 4000K        | 12    | 743    | 93  | White Can-free |

**SPECIFICATIONS**

|                |            |                    |        |               |             |      |
|----------------|------------|--------------------|--------|---------------|-------------|------|
| Warranty:      | 5 Years    | Max. Ambient Temp: | 45° C  | R9-Value:     | Beam Angle: | 99°  |
| Expected Life: | 50,000 hrs | Min. Ambient Temp: | -18° C | Power Factor: | THD:        | <20% |






Project:  Date:

Prepared By:

Comments

**DIMMING COMPATIBILITY**

| March 30, 2018 |               | Easy Up Dimmers (Require neutral wire connection) |            |                            |       |                          |   |
|----------------|---------------|---|------------|----------------------------|-------|--------------------------|---|
| Brand          | Type          | Series  | Model #    | Wiring                     | watts | dimming method           | Notes   |
| Lutron         | ELV           | Divia   | DVELV-303P | Single-pole/3-way          | 300   | slide with ON/OFF button | 3-Way only works with a 3-Way switch              |
|                | ELV           | Maestro   | MAELV-600  | Single-pole/multi-location | 600   | Digital                  | Multi-location only work with MA-R (not a dimmer) |
|                | ELV           | Nova T  | NTELV-300  | Single Pole                | 300   | slide to off             |   |
|                | ELV           | Skylark   | SELV-303P  | Single-pole/3-way          | 300   | slide with ON/OFF button | 3-Way only works with a 3-Way switch              |
|                | ELV           | Skylark Contour                                   | CTELV-303P | Single-pole/3-way          | 300   | slide with ON/OFF button | 3-Way only works with a 3-Way switch              |
|                | Reverse Phase | Divia   | DVRP-253P  | Single-pole/3-way          | 250   | slide with ON/OFF button | 3-Way only works with a 3-Way switch              |
|                | Reverse Phase | Nova T  | NTRP 250   | Single Pole                | 250   | slide to off             |   |
|                | Reverse Phase | Skylark Contour                                   | CTRP-253P  | Single-pole/3-way          | 250   | slide with ON/OFF button | 3-Way only works with a 3-Way switch              |

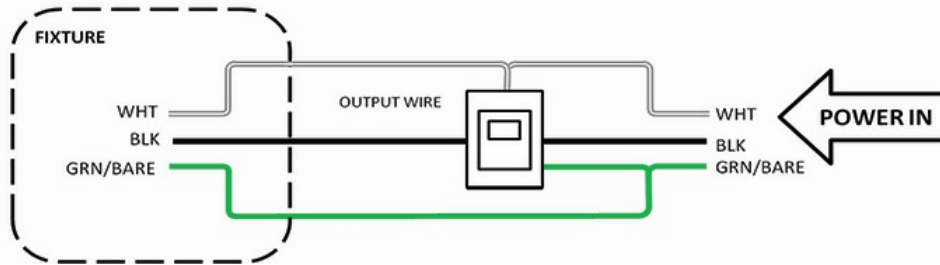

**DIMENSIONS**

**Photometrics**

